

GZMR231103224501

Date: Nov 15, 2023

1 of 9 Page:



POWER DEKOR DARE(JIANGSU) FLOORING CO., LTD. **CUSTOMER NAME:**

ADDRESS: 212310 DARE WOOD INDUSTRIAL PARK, DANYANG CITY,

JIANGSU, CHINA

Sample Name : POWER DEKOR THREE LAYER FLAME-RESISTANT ENGINEERED

FLOORING

Material and Mark OAK

Product specification 1900*190*15/3

Buyer **BETTER TRADING 2019 LTD**

Manufacturer POWER DEKOR DARE(JIANGSU) FLOORING CO., LTD.

Above information and sample(s) was/were submitted and confirmed by the client. SGS, however, assumes no responsibility to verify the accuracy, adequacy and completeness of the sample

information provided by client.

SGS Ref. No. : XMIN2311001313CM01

Date of Receipt Nov 03, 2023 : Nov 03, 2023 **Testing Start Date Testing End Date** Nov 15, 2023

Test result(s) : For further details, please refer to the following page(s)

(Unless otherwise stated the results shown in this test report refer only

to the sample(s) tested)

Signed for SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Kelly Lee

Authorized signatory





No.: GZMR231103224501

Date: Nov 15, 2023

Page: 2 of 9

Summary of Results:


No.	Test Item	Test Method	Result	Conclusion
	Fire Classification for	EN 13501-1:2018 Clause		
1	Burning Behavior of	9 & EN ISO 9239-1:2010	B _{fl} -s1	/
	Flooring Material	& EN ISO 11925-2:2020		

Note: Pass : Meet the requirements;

Fail: Does not meet the requirements;

/: Not Apply to the judgment.

Original Sample Photo:

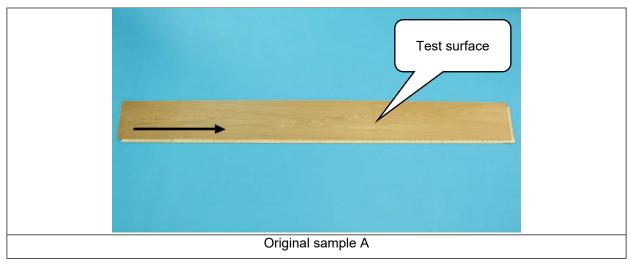



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of his document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or semile CORD Doccheck/Bass.com

or e mail: CM_100cm eckwes aggs.com La kig Keinbindi, Sämori (ki Eomini i Farthring) Leekingmethe, Gargatin, Gargatin, Gargatin, Giria 中国・广东・广州高新技术产业开发区科学域科珠路198号 中国・广东・广州市黄埔区开创大道1501号3株101房 ((86-20) 8215555 sgs.china@sgs.com



No.: GZMR231103224501

Date: Nov 15, 2023

Page: 3 of 9

Test item: Fire Classification for Burning Behavior of Flooring Material

Sample Description: Floor

Test Method: EN 13501-1:2018 Clause 9 & EN ISO 9239-1:2010 & EN ISO 11925-2:2020

Test Result:

I . EN ISO 9239-1:2010 Reaction to fire tests for floorings-Part 1: Determination of the burning

behaviour using a radiant heat source

Specimen: 1050mm × 230mm × 15 mm(make up of 2 pieces sample)

Flame application time: 10min

Mounting and fixing: Calcium silicate board, with its density about 1016kg/m³, thickness about

21.4mm, is as the substrate. The specimens were fixed mechanically to the

substrate.

Specimen	Furthest extent of	Critical heat flux	Integrated smoke
No.	spread of flame, mm	(HF-30),kW/m²	value, %·min
1	300	7.49	288.4
2	270	8.21	284.3
3	260	8.45	286.4
Average	280	8.1	286

Note:

- 1. Test specimens were cut from the sample.
- 2. Specimens which are extinguished by the operator at 30 min do not have a CHF value, but only a HF-30 value.
- 3. For test durations longer than 30 min, record the time of flame extinguishment and the most distant point of flame spread and convert this to CHF.
- 4. Observations of the burning characteristics: Charring.

中国・广东・广州高新技术产业开发区科学城科珠路198号



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend to the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection reports. & certificate, please contact us at telephone: (86-755) 8307 1443,

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 144: or email: CN_Doccheck@sgs.com

中国·广东·广州市黄埔区开创大道1501号3栋101房 t(86-20)8215555 sgs.china@sgs.com



No.: GZMR231103224501

Date: Nov 15, 2023

Page: 4 of 9

II. EN ISO 11925-2:2020 Reaction to fire tests-Ignitability of products subjected to direct impingement

of flame-Part 2: Single-flame source test.

Specimen: 250mm × 90mm × 15 mm

Flame application time: 15s

Exposure conditions	Edge exposure		Surface exposure			
Specimen No.	1	2	3	1	2	3
Whether ignition occurs	Yes	Yes	Yes	Yes	Yes	Yes
Whether the flame tip reaches 150 mm above the flame application point within 20s	No	No	No	No	No	No
Whether ignition of the filter paper occurs	No	No	No	No	No	No

Note:

- 1. Test specimens were cut from the sample.
- 2. Observations of the burning characteristics: Charring.

Conclusion:

According to the test result and classification criteria (See table 1), the submitted sample satisfies Class B_{fl}

Reaction to fire classification: B_{fl}-s1

Statement: The test results relate to the behavior of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Ferms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (8e-755) 8307 1443,

or email: L.N.U.Occ.meck.(@sgs.com | Duk (M.Skelmke) skarok (Chromic Iskaroko) Dekomerke, Gargoto, Gargoto, Gira 中国・广东・广州高新技术产业开发区科学域科珠路198号 中国・广东・广州市黄埔区开创大道1501号3株101房 ((86-20) 8215555 sgs.china@sgs.com



No.: GZMR231103224501

Date: Nov 15, 2023

Page: 5 of 9

Table 1. Classes of reaction to fire performance for floorings

Class	Test method(s)	Classification criteria	Additional classification	
A1 _{fl}	EN ISO 1182 ^a	Δ <i>T</i> ≤ 30 °C; and		
	and	Δ <i>m</i> ≤ 50 %; and	-	
		$t_{\rm f}$ = 0 (i.e. no sustained flaming)		
	EN ISO 1716	PCS ≤ 2,0 MJ/kg ^a and		
		PCS ≤ 2,0 MJ/kg ^b and		
		PCS ≤ 1,4 MJ/m ² ° and	-	
		PCS ≤ 2,0 MJ/kg ^d		
A2 _{fl}	EN ISO 1182 ª	Δ <i>T</i> ≤ 50 °C and		
	or	Δ <i>m</i> ≤ 50 % and	-	
		<i>t</i> _f ≤ 20 s		
	EN ISO 1716	PCS ≤ 3,0 MJ/kg ^a and		
	and	<i>PCS</i> ≤ 4,0 MJ/m ^{2 b} and		
		<i>PCS</i> ≤ 4,0 MJ/m ^{2 c} and	-	
		PCS ≤ 3,0 MJ/kg ^d		
	EN ISO 9239-1 °	Critical flux ^f ≥ 8,0 kW/m ²	Smoke production ^g	
B _{fl}	EN ISO 9239-1 e	Critical flux ^f ≥ 8,0 kW/m ²	Smoke production ^g	
	and			
	EN ISO 11925-2 h:	<i>F</i> s ≤ 150 mm within 20 s		
	Exposure = 15 s		-	
C _{fl}	EN ISO 9239-1 °	Critical flux ^f ≥ 4,5 kW/m ²		
	and		Smake production (
	EN ISO 11925-2 h:	<i>F</i> s ≤ 150 mm within 20 s	Smoke production ^g	
	Exposure = 15 s			
_	EN ISO 9239-1 e	Critical flux ^f ≥ 3.0 kW/m ²		
D _{fl}	and		Smoke production ^g	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document os not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@ags.com

To Mick (Maching Associated Cartinating Designating Garaging Cartinating Associated Cartinating Designating Garaging Cartinating Designating Garaging Cartinating Associated Cartinating Associated Cartinating Associated Cartinating Associated Cartinating Cartinating Associated Cartinating Car

中国・广东・广州高新技术产业开发区科学城科珠路198号



No.: GZMR231103224501

Date: Nov 15, 2023

Page: 6 of 9

	EN ISO 11925-2 h:	<i>F</i> s ≤ 150 mm within 20 s	
	Exposure = 15 s		
E	EN ISO 11925-2 h:	<i>F</i> s ≤ 150 mm within 20 s	
E _{fl}	Exposure = 15 s		-
E	EN ISO 11925-2 h:	Fs > 150 mm within 20 s	
F _{fl}	Exposure = 15 s		-

^a For homogeneous products and substantial components of non-homogeneous products.

- ^b For any external non-substantial component of non-homogeneous products.
- ^c For any internal non-substantial component of non-homogeneous products.
- ^d For the product as a whole.
- e Test duration = 30 min.
- ^f Critical flux is defined as the radiant flux at which the flame extinguishes or the radiant flux after a test period of 30 min, whichever is the lower (i.e. the flux corresponding with the furthest extent of spread of flame).
- $9 \text{ s1} = \text{Smoke} \le 750 \% \text{ minutes};$ s2 = not s1.
- ^h Under conditions of surface flame attack and, if appropriate to the end use application of the product, edge flame attack



中国・广东・广州高新技术产业开发区科学城科珠路198号

中国・广东・广州市黄埔区开创大道1501号3栋101房 t(86-20)8215555 sgs.china@sgs.com



No.: GZMR231103224501

Date: Nov 15, 2023

Page: 7 of 9

Test Photo:



During test- Radiant heat source







After test- Radiant heat source



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ass.com

referentiation (1.00m. DOCCHECK (Most Signature) (Most 中国・广东・广州高新技术产业开发区科学城科珠路198号



No.: GZMR231103224501

Date: Nov 15, 2023

Page: 8 of 9







During test- Ignitability- Surface exposure



Before test- Ignitability-Edge exposure



After test- Ignitability- Edge exposure




referentiation (1.00m. DOCCHECK (Most Signature) (Most



No.: GZMR231103224501

Date: Nov 15, 2023

Page: 9 of 9

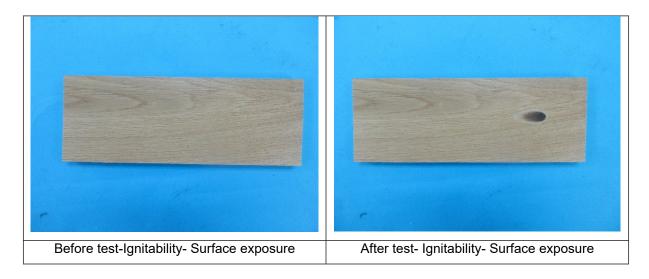

Equipment Information:

Equipment	Model	Equipment No.	Calibration date	Next Calibration
Equipment				date
Ignitability tester	SIT	GZMR-PL-E226	2023-02-20	2024-02-19
Flooring Radiant	FPR	GZMR-PL-E227	2023-04-21	2024-04-20
Panel Tester	IFK	GZIVIIN-IFL-EZZI	2023-04-21	2024-04-20

****** End of report******



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond

or e mail: CM_100cm eckwes aggs.com La kig Keinbindi, Sämori (ki Eomini i Farthring) Leekingmethe, Gargatin, Gargatin, Gargatin, Giria 中国・广东・广州高新技术产业开发区科学域科珠路198号 中国・广东・广州市黄埔区开创大道1501号3株101房 ((86-20) 8215555 sgs.china@sgs.com